



## Indicator Post | Horizontal Wall | IPW-1




### SPECIFICATIONS

Application	Operate hidden or buried post indicator or NRS Valves
Compatibility	NRFL-4 or NRGL-4 models only
Valve Sizes	4"/DN100 to 12"/DN300
Indicator Positions	'OPEN' & 'SHUT'
Finish	Epoxy resin coated
Conformity	UL 789, ULC / ORD-C789 & FM 1000
Approvals	UL, C-UL, FM

### Materials list

Item	Part	Qty	Material	Specification
1	Joint	1	Cast Iron	ASTM A126
2	Cotter Pin	1	Steel 1035	ASTM A29
3	Driving Rod	1	Steel 1045	ASTM A29
4	Main body	1	Cast Iron	ASTM A126
5	Indicator Plate	4	A413.0	ASTM S12A
6	Gasket Nut	4	Steel 1035	ASTM A29
7	Stud Bolt	4	Steel 1035	ASTM A29
8	Position Bracket	1	Stainless Steel 304	ASTM A276
9	Driver	1	Stainless Steel 304	ASTM A276
10	Retainer Ring	1	Steel 1566	ASTM A29
11	Upper Cover	1	Cast Iron	ASTM A126
12	Handwheel	1	Cast Iron	ASTM A126
13	Gasket	1	A283 Gr. C	ASTM A36
14	Lift Ring	1	Steel 1035	ASTM A29
15	Screw	1	Steel 1035	ASTM A29
16	Nut	2	Steel 1035	ASTM A29
17	Bolt	2	Steel 1035	ASTM A29
18	Screw Plug	1	Steel 1035	ASTM A29
19	Bolt, Flat Gasket	4	Stainless Steel 304	ASTM A276
20	Keyhole Plate	2	A283 Gr. C	ASTM A36
21	Key Hole	2	Organic glass	-
22	Keyhole Plate Gasket	2	EPDM	ASTM D2000

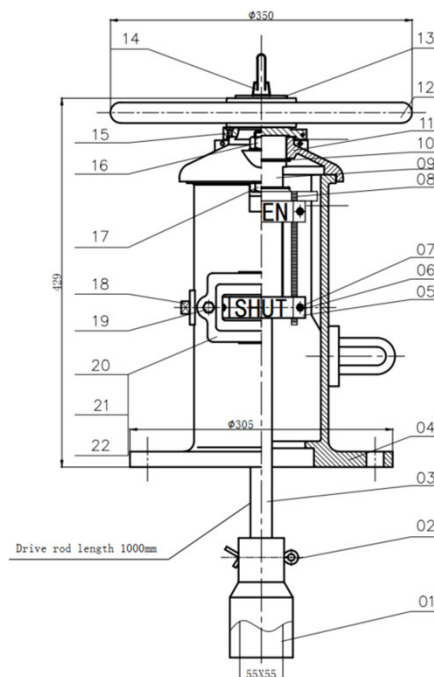

### Operation

1. Ensure that the gate valve is closed.
2. Remove the indicator cover.
3. Measure off the length of the connecting rod according to the depth of the gate valve and cut off the excess length.
4. Connect the post indicator to the gate valve.
5. 4. Adjust the indicator to the 'SHUT' position.
6. 5. Tighten the flange connection bolts.
7. 6. Install the indicator cover

**Note:** This document contains basic product information only. For more information, contact your local VIKING Sales Representative. Certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to change without prior notice. All rights reserved. Images are purely for illustration only. Fireking™ is a trademark of The Viking Corporation.

Trusted above all.

The Viking Corporation (far East) Pte. Ltd. | 69 Tuas View Square, Westlink Techpark, Singapore 637621 | vikingapac@vikingcorp.com

